

# W-4060


## 4U 14-Slot Rackmount Industrial Automation Chassis with 6.5" TFT LCD



### System

Construction	Heavy-duty steel chassis
Color	Black
Disk Drive bay	2 x 5.25" Drives (External)
	2 x 3.5" Drives (1 x External, 1 x Internal)
Cooling Fan	1 x 9.2cm/70 CFM with removable filter
Control	Power ON/OFF, System reset, Monitor function adjustment
Indicator	1 x Power ON, HDD activity
Front I/O	2 x USB ports
Keyboard	88-Keyboard and Touch Pad
Temperature	0 ~ 50°C (32 ~113°F), operation
Humidity	5 ~ 95%, @40°C non-condensing
Net Weight	15 kg (33 lb)
Gross Weight	17 kg (37.4 lb)

### Dimension Drawing

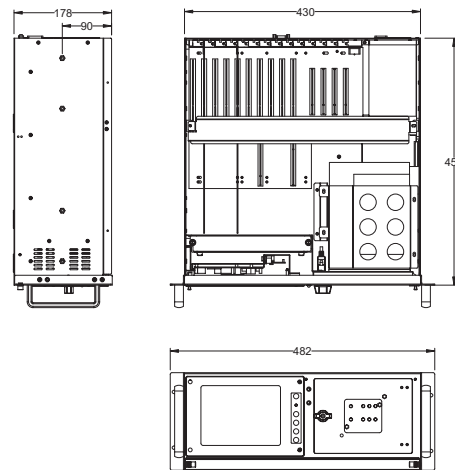

Unit:mm

### LCD Display

Size / Type	6.5" TFT color LCD
Max Resolution	640 x 480, VGA
Luminance cd/m <sup>2</sup>	300
Contrast Ratio	250:1
Back light MTBF	50,000hours

### Backplane

Model Name	System	Expansion Slots
PBPI-14SA	Single	8 x ISA / 2 x PICMG / 4 x PCI
PBPX-14P12	Single	1 x ISA / 2 x PICMG / 12 x PCI

### Ordering Information

Model Name	w/Backplane	w/Power Supply
W-4060-C14A-AX300	PBPI-14SA	IPS-ZKS-300WX
W-4060-C14P12-AX300	PBPX-14P12	IPS-ZKS-300WX

### Power Supply

Model Name	Watt	Input Range	Max. Load	Min. load
IPS-ZKS-300WX	300W (ATX)	90~265V AC 47~63Hz	+3.3V@20A	+3.3V@2A
			+5V@30A	+5V@3A
			+12V@12A	+12V@1.2A
			-5V@0.5A	
			-12V@1A	
			5VSB@1.5A	